


JIS B 2220

Düz Flanş (SOP)

16K

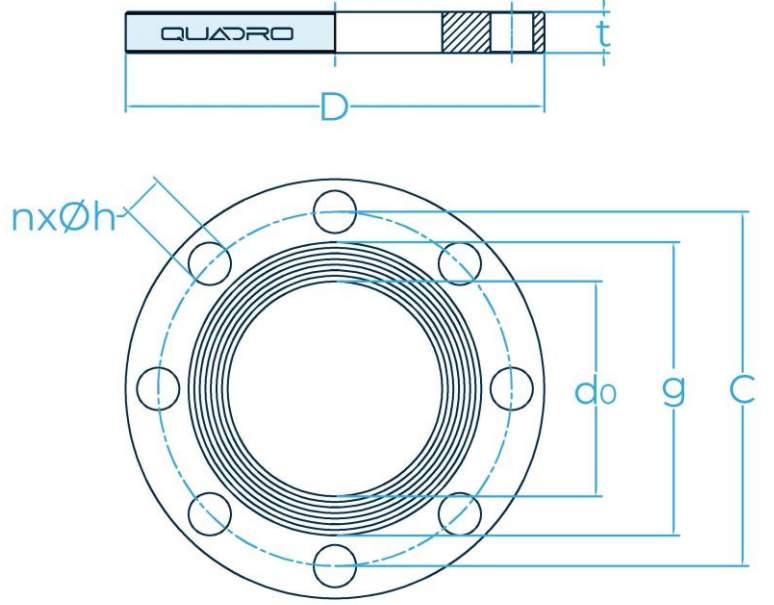

EBAT		FLANŞ ÖLÇÜLERİ				DELİK ÖZELLİKLERİ				BİRİM AĞIRLIK
DN	NPS	d ₀	D	t	g	n	C	h	Cıvata	kg/adet
10	3/8"	17,8	90	12	46	4	65	15	M12	0,51
15	1/2"	22,2	95	12	51	4	70	15	M12	0,56
20	3/4"	27,7	100	14	56	4	75	15	M12	0,72
25	1"	34,5	125	14	67	4	90	19	M16	1,12
32	1 1/4"	43,2	135	16	76	4	100	19	M16	1,47
40	1 1/2"	49,1	140	16	81	4	105	19	M16	1,55
50	2"	61,1	155	16	96	8	120	19	M16	1,72
65	2 1/2"	77,1	175	18	116	8	140	19	M16	2,42
80	3"	90	200	20	132	8	160	23	M20	3,41
90	3 1/2"	102,6	210	20	145	8	170	23	M20	3,62
100	4"	115,4	225	22	160	8	185	23	M20	4,49
125	5"	141,2	270	22	195	8	225	25	M22	6,51
150	6"	166,6	305	24	230	12	260	25	M22	8,55
200	8"	218	350	26	275	12	305	25	M22	10,8
250	10"	269,5	430	28	345	12	380	27	M24	17,9
300	12"	321	480	30	395	16	430	27	M24	21,4
350	14"	358,1	540	34	440	16	480	33	M30x3	30,6
400	16"	409	605	38	495	16	540	33	M30x3	42,5
450	18"	460	675	40	560	20	605	33	M30x3	54,8
500	20"	511	730	42	615	20	660	33	M30x3	64,7
550	22"	562	795	44	670	20	720	39	M36x3	77,5
600	24"	613	845	46	720	24	770	39	M36x3	85,6
650	26"	664	895	48	790	24	820	39	M36x3	95,8
700	28"	715	960	50	840	24	875	42	M39x3	113
750	30"	766	1020	52	900	24	935	42	M39x3	132
800	32"	817	1085	54	960	24	990	48	M45x3	151
850	34"	868	1135	56	1010	24	1040	48	M45x3	166
900	36"	919	1185	58	1050	28	1090	48	M45x3	177
1000	40"	1021	1320	62	1160	28	1210	56	M52x3	234

*Tüm ölçüler mm olarak verilmektedir. Tabloda yer almayan ölçüleri için bizimle iletişime geçiniz.

**Aksi belirtilmediği sürece d₀ ölçüsü EN10220 standardına uygun borulara göre imal edilmektedir.

