


JIS B 2220

Düz Flanş (SOP)

20K

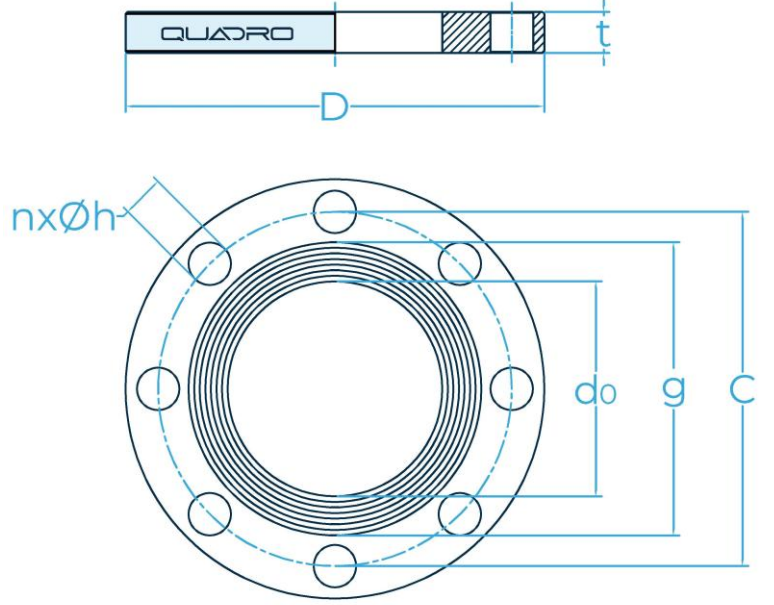

EBAT		FLANŞ ÖLÇÜLERİ				DELİK ÖZELLİKLERİ				BİRİM AĞIRLIK
DN	NPS	d ₀	D	t	g	n	C	h	Cıvata	kg/adet
10	3/8"	17,8	90	14	46	4	65	15	M12	0,59
15	1/2"	22,2	95	14	51	4	70	15	M12	0,66
20	3/4"	27,7	100	16	56	4	75	15	M12	0,82
25	1"	34,5	125	16	67	4	90	19	M16	1,28
32	1 1/4"	43,2	135	18	76	4	100	19	M16	1,66
40	1 1/2"	49,1	140	18	81	4	105	19	M16	1,75
50	2"	61,1	155	18	96	8	120	19	M16	1,93
65	2 1/2"	77,1	175	20	116	8	140	19	M16	2,69
80	3"	90	200	22	132	8	160	23	M20	3,75
90	3 1/2"	102,6	210	24	145	8	170	23	M20	4,34
100	4"	115,4	225	24	160	8	185	23	M20	4,89
125	5"	141,2	270	26	195	8	225	25	M22	7,69
150	6"	166,6	305	28	230	12	260	25	M22	9,97
200	8"	218	350	30	275	12	305	25	M22	12,5
250	10"	269,5	430	34	345	12	380	27	M24	21,7
300	12"	321	480	36	395	16	430	27	M24	25,7
350	14"	358,1	540	40	440	16	480	33	M30x3	36
400	16"	409	605	46	495	16	540	33	M30x3	51,4
450	18"	460	675	48	560	20	605	33	M30x3	65,8
500	20"	511	730	50	615	20	660	33	M30x3	77,1
550	22"	562	795	52	670	20	720	39	M36x3	91,6
600	24"	613	845	54	720	24	770	39	M36x3	100
650	26"	664	945	60	790	24	850	48	M45x3	147
700	28"	715	995	64	840	24	900	48	M45x3	167
750	30"	766	1080	68	900	24	970	56	M52x3	211
800	32"	817	1140	72	960	24	1030	56	M52x3	247
850	34"	868	1200	74	1020	24	1090	56	M52x3	279
900	36"	919	1250	76	1070	28	1140	56	M52x3	295

*Tüm ölçüler mm olarak verilmektedir. Tabloda yer almayan ölçüleri için bizimle iletişime geçiniz.

**Aksi belirtilmediği sürece d₀ ölçüsü EN10220 standardına uygun borulara göre imal edilmektedir.

