


DIN86044-1

Egzoz Flanş

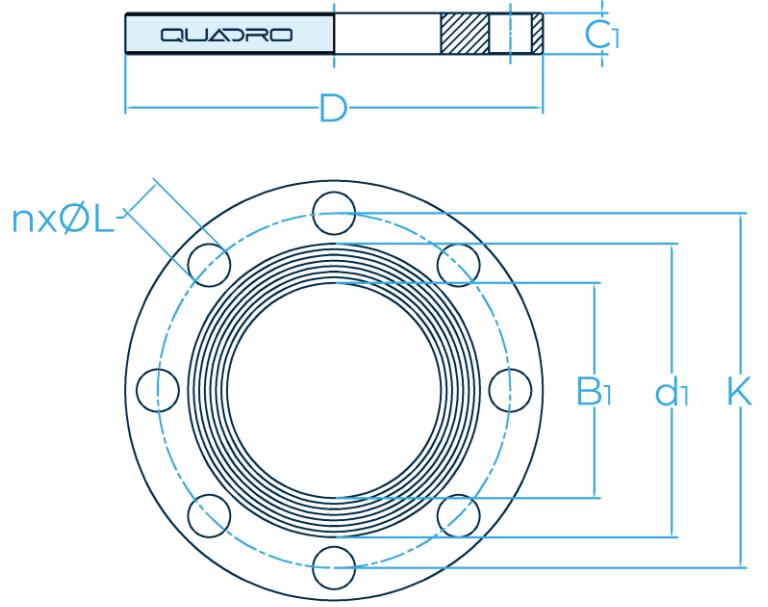

EBAT		FLANŞ ÖLÇÜLERİ				DELİK ÖLÇÜLERİ				Birim Ağırlık (kg/adet)
DN	A	B ₁	D	C ₁	d ₁	K	n	Cıvata	L	
32-150	DN32-DN150 anma çap aralığında DIN2576 normuna uygun PN16 Düz Flanş (Tip01) kullanılması önerilmektedir.									
200	219,1	222	320	16	255	280	8	M16	18	4,98
250	273	276	375	16	310	335	12	M16	18	5,97
300	323,9	327	440	16	365	395	12	M20	22	7,98
350	355,6	359	490	16	415	445	12	M20	22	10,4
400	406,4	410	540	16	465	495	16	M20	22	11,4
450	457	461	595	16	520	550	16	M20	22	13,2
500	508	512	645	16	570	600	20	M20	22	14,2
550	559	563	703	20	620	650	20	M20	22	20,7
600	610	614	754	20	670	700	20	M20	22	22,4
650	660	665	805	20	720	750	20	M20	22	24,2
700	711	716	856	20	770	800	24	M20	22	25,7
750	762	767	907	20	830	860	24	M20	22	27,5
800	813	818	958	20	870	900	24	M20	22	29,2
850	864	870	1010	20	920	950	28	M20	22	30,8
900	914	920	1060	20	980	1010	28	M20	22	32,5
950	964	970	1110	20	1030	1060	28	M20	22	34,2
1000	1016	1022	1162	20	1080	1110	32	M20	22	35,8
1100	1120	1126	1266	20	1180	1210	32	M20	22	39,4


*Tüm ölçüler mm olarak verilmektedir. Tabloda yer almayan ölçüleri için bizimle iletişime geçiniz.

**DIN86044-1 standardında $\pm 1,5$ mm kalınlık toleransı verilmiştir.



DIN86044-1

Egzoz Flanş

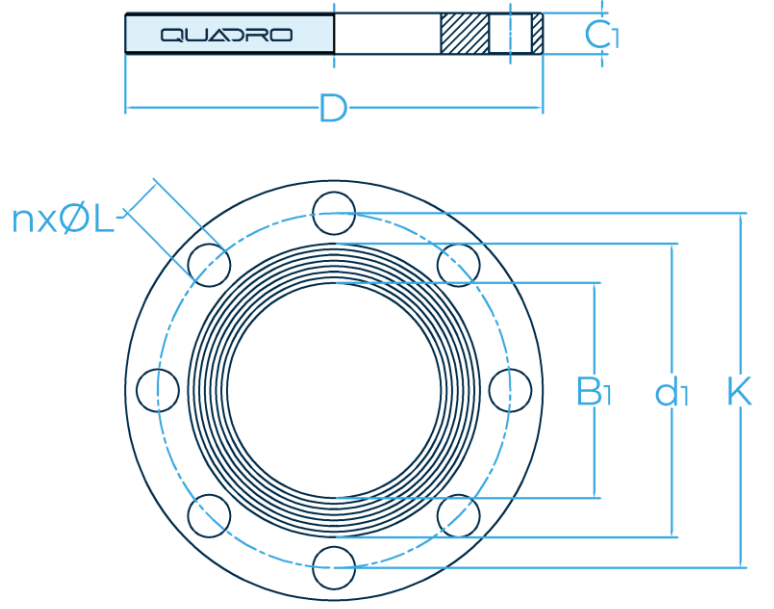

EBAT		FLANŞ ÖLÇÜLERİ				DELİK ÖLÇÜLERİ				Birim Ağırlık (kg/adet)
DN	A	B ₁	D	C ₁	d ₁	K	n	Cıvata	L	
1200	1220	1226	1366	20	1280	1310	36	M20	22	42,6
1300	1320	1326	1466	20	1380	1410	40	M20	22	45,8
1400	1420	1426	1566	20	1480	1510	40	M20	22	49,3
1500	1520	1526	1666	20	1580	1610	44	M20	22	52,5
1600	1620	1626	1766	20	1680	1710	48	M20	22	55,7
1700	1720	1726	1866	20	1780	1810	48	M20	22	59,1
1800	1820	1826	1966	20	1880	1910	52	M20	22	62,4
1900	1920	1926	2066	20	1980	2010	56	M20	22	65,6
2000	2020	2026	2166	20	2080	2110	56	M20	22	69
2100	2120	2126	2266	20	2180	2210	60	M20	22	72,2
2200	2220	2226	2366	20	2280	2310	64	M20	22	75,5
2300	2320	2326	2466	20	2380	2410	64	M20	22	78,9
2400	2420	2426	2566	20	2480	2510	68	M20	22	82,1
2500	2520	2526	2666	20	2580	2610	72	M20	22	85,3
2600	2620	2626	2766	20	2680	2710	72	M20	22	88,8
2700	2720	2726	2866	20	2780	2810	76	M20	22	92
2800	2820	2826	2966	20	2880	2910	80	M20	22	95,2
2900	2920	2926	3066	20	2980	3010	80	M20	22	98,7
3000	3020	3026	3166	20	3080	3110	84	M20	22	102

*Tüm ölçüler mm olarak verilmektedir. Tabloda yer almayan ölçüleri için bizimle iletişime geçiniz.

**DIN86044-1 standardında $\pm 1,5$ mm kalınlık toleransı verilmiştir.

