


JIS B 2220

Kör Flanş (BL)

10K

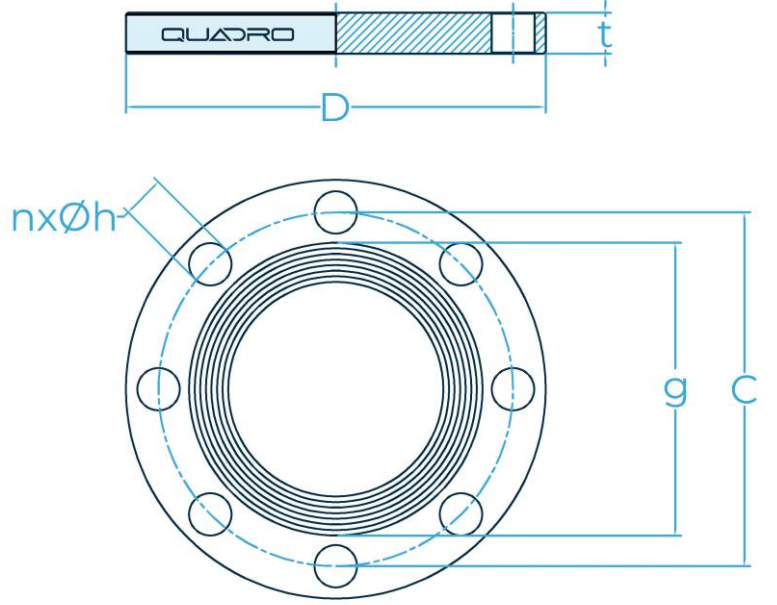

EBAT		FLANŞ ÖLÇÜLERİ			DELİK ÖZELLİKLERİ				BİRİM AĞIRLIK
DN	NPS	D	t	g	n	C	h	Cıvata	kg/adet
10	3/8"	90	12	46	4	65	15	M12	0,53
15	1/2"	95	12	51	4	70	15	M12	0,6
20	3/4"	100	14	56	4	75	15	M12	0,79
25	1"	125	14	67	4	90	19	M16	1,22
32	1 1/4"	135	16	76	4	100	19	M16	1,66
40	1 1/2"	140	16	81	4	105	19	M16	1,79
50	2"	155	16	96	4	120	19	M16	2,23
65	2 1/2"	175	18	116	4	140	19	M16	3,24
80	3"	185	18	126	8	150	19	M16	3,48
90	3 1/2"	195	18	136	8	160	19	M16	3,9
100	4"	210	18	151	8	175	19	M16	4,57
125	5"	250	20	182	8	210	23	M20	7,18
150	6"	280	22	212	8	240	23	M20	10,1
175	7"	305	22	237	12	265	23	M20	11,8
200	8"	330	22	262	12	290	23	M20	13,9
225	9"	350	22	282	12	310	23	M20	15,8
250	10"	400	24	324	12	355	25	M22	22,6
300	12"	445	24	368	16	400	25	M22	27,8
350	14"	490	26	413	16	445	25	M22	36,9
400	16"	560	28	475	16	510	27	M24	52,1
450	18"	620	30	530	20	565	27	M24	68,4
500	20"	675	30	585	20	620	27	M24	81,6
550	22"	745	34	640	20	680	33	M30	112
600	24"	795	36	690	24	730	33	M30	134
650	26"	845	38	740	24	780	33	M30	161
700	28"	905	40	800	24	840	33	M30	196
750	30"	970	44	855	24	900	33	M30	248
800	32"	1020	46	905	28	950	33	M30	286
850	34"	1070	48	955	28	1000	33	M30	330
900	36"	1120	50	1005	28	1050	33	M30	377
1000	40"	1235	56	1110	28	1160	39	M36	512

*Tüm ölçüler mm olarak verilmektedir. Tabloda yer almayan ölçüleri için bizimle iletişime geçiniz.

